



7月デイリー Overhead View of Conditioner Pattern

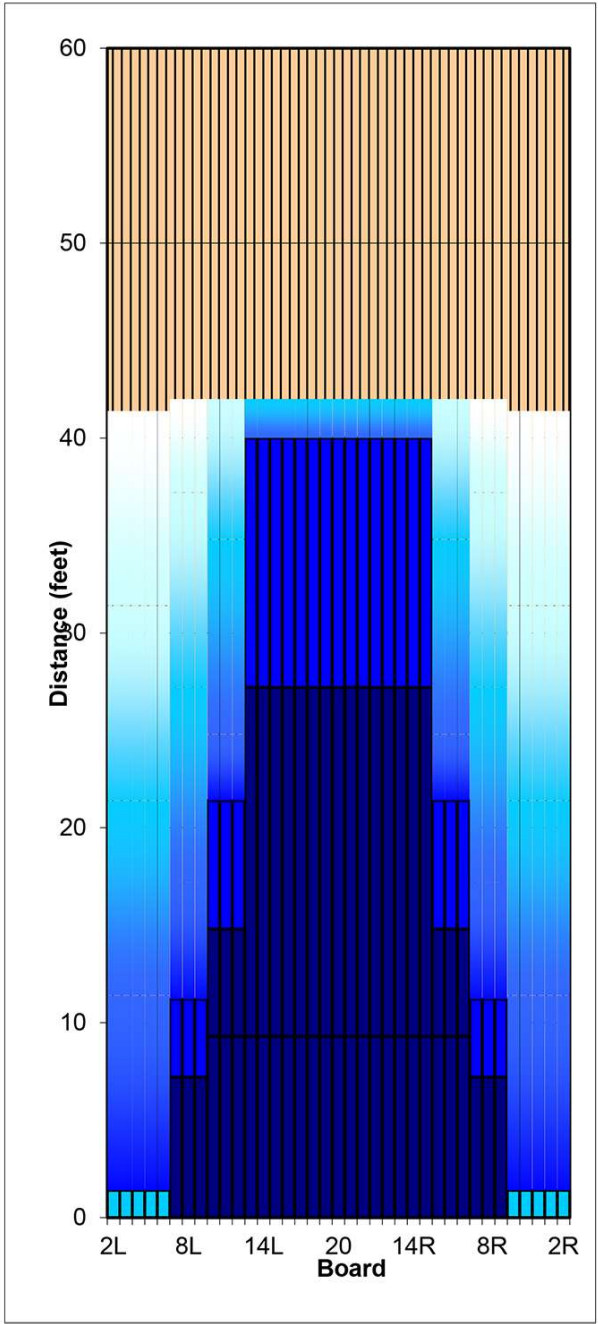

スパットエリア 比率	Avg. 2-5L:16L-20	Avg. 6-10L:16L-20	Avg. 11-15L:16L-20	Avg. 16L-20:20-16R	Avg. 16L-20:20-16R	Avg. 20-16R:15-11R	Avg. 20-16R:10-6R	Avg. 20-16R:5-2R
	100	330	950	1150	1150	950	330	100
	11.50	3.48	1.21	1.00	1.00	1.21	3.48	11.50

トラックエリア 比率	左サイド トラック比率	Ave. 3L-7L:18L-18R	Ave. 8L-12L:18L-18R	Ave. 13L-17L:18L-18R	右サイド トラック比率	Ave. 18L-18R:17R-13R	Ave. 18L-18R:12R-8R	Ave. 18L-18R:7R-3R
		Outside Track:Middle	Middle Track:Middle	Inside Track:Middle		Middle:Inside Track	Middle:Middle Track	Middle:Outside Track
		8.21	2.25	1.00		1.00	2.25	8.21

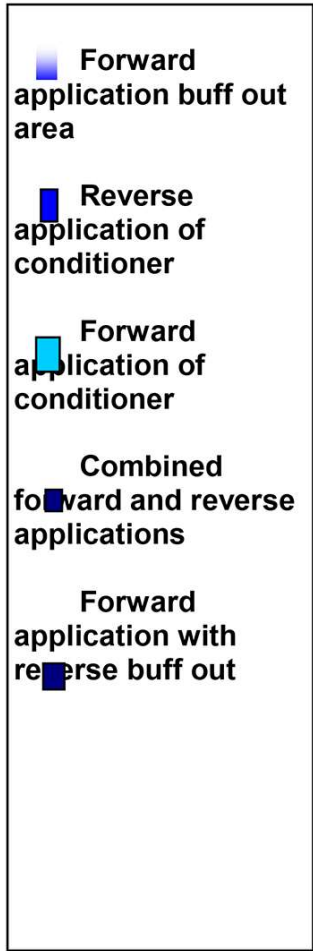